

# Fiber Reinforced Polymer Composites: A Review

Thomas M Visacanthara<sup>1</sup>, Dr. Asaletha R<sup>2</sup>, Arun Thomas<sup>3</sup> & Rakesh Reghunath<sup>4</sup>

<sup>1</sup>Student, <sup>2</sup>Associate Professor, <sup>3,4</sup>Assistant Professor

<sup>1,3,4</sup> Department of Mechanical Engineering, <sup>2</sup> Department of Applied Science,

<sup>1,3,4</sup> Amal Jyothi College of Engineering, <sup>2</sup> CUCEK Cochin University of Science and Technology

**Abstract**— Fibre reinforced polymer (FRP) composites mainly consist of high strength fibres embedded in polymer matrix keeping a distinct interface between them. In this FRP's the individual component keeps their distinct physical and chemical identities but they combine together to produce materials with excellent properties. Low density, high tensile strength and high modulus are the main characteristics of fibre reinforced polymer composites. The main factors that affect load carrying capacity are interfacial bonding between fibre and matrix, alignment of fibre in matrix and the nature of fibres. Here in this review a comparative account of the major synthetic and natural fibre as reinforcement for polymer composites as well as methods for enhancing mechanical properties are discussed.

**Keywords:** Polymer composites, Synthetic fibres, Natural fibres, Mechanical properties, tribological properties

## I. INTRODUCTION

The importance of composite materials is being increasing day by day because of its attractive properties in this fast-growing world. For the past few decades, fibre reinforced polymer (FRP) composite materials are being considered as alternatives for the metallic components in aerospace, defence, automobile, electrical and electronic industries. Compared to metals, FRP composites have low density, higher stiffness and specific strength, improved fatigue performance and higher corrosion resistance and high strength to weight ratio. The performance of these FRPs under various loading conditions; such as torsional, axial and impact loading is very important for the design of the structural components [1]. Actually, the FRP composites are a category under polymer matrix composites (PMC). Generally, PMC consists of two phases namely, the matrix phase and reinforcement phase. Mechanical properties and tribological properties of fibre reinforced polymer composites depend on the fibre, matrix and the interface between them. By modifying the matrix phase, using suitable fillers properties of these fiber reinforced polymer composites can be improved [2]-[3].

This review gives an overview about various kinds of synthetic and natural fibres used in developing polymer matrix composites. Presently the common synthetic fibres used are carbon, Kevlar and glass. Apart from synthetic fibres, reinforcements from natural sources are also used for reinforcing polymer matrices. All these reinforcements are less dense and bind the matrix with high strength and stiffness [4]. The natural polymers reinforced together with the synthetic fibres such as glass fibre, aramid fibres and carbon fibre provide advantages of high stiffness/strength to weight ratio as compared to the conventional materials [5]-[6]. The major natural sources for fibres are Jute, kenaf, coconut, rice husk, sisal and banana [7]. The properties of the matrix had a major influence on the compressive strength of FRP composites. In addition, the interaction between matrix and fibres is much important for designing damage-resistant and damage-tolerant composite structures. In order to improve the compressive strength, damage tolerance and resistance of the composites, the epoxy is modified with various kinds of fillers [8]. One of the traditional way is that, the micron-sized fillers are incorporated into the epoxy resin. However, for such fillers there are some drawbacks, such as reduction in failure strain, impact strength, and sometimes fracture toughness and thermal stability of the epoxy [9]. The problem has been overcome through adding nanoparticles into the epoxy matrix. There are several types of nanoparticles which are commercially available and commonly used for the development of nanoparticle-filled polymer called nanocomposites, such as montmorillonite organoclay, carbon nanotubes, Nano silica and nano fibers. The objectives of adding these nano fillers are to enhance the strength, elastic modulus and toughness without losing the strain to failure and the thermal stability of the epoxy resin [10].

## II. CLASSIFICATION OF REINFORCING FIBRES

### A. GLASS FIBRES

Glass fibres one of the widely used polymer reinforcements with about, 93% of all FRP are reinforced with glass fibres. Glass fibres are used in the manufacture of printed circuit boards, structural composites and a large range of special-purpose products [11]-[12]. Out of it, the oldest and the most common form is the E-glass or electrical grade glass fibre. Other kinds of glass fibres include A-glass or alkali glass, C-glass or chemical resistant glass, and the high strength R-glass or S-glass. Under laboratory situation glass fibres can withstand tensile stresses of about 7000 N/mm<sup>2</sup>. whereas the commercial glass fibres range 2800 to 4800 N/mm<sup>2</sup>.

The glass melts are made by fusing silica with minerals, which contains the oxides needed to get a given composition. The molten mass is suddenly cooled to prevent crystallization and then formed into glass fibres by the process known as fiberization [13]. The mechanical behaviours of fibre-reinforced (FR) composites are mainly dependent on their intrinsic abilities to enable stress transfer, which also depends on the matrix strength, fibre strength and the strength of interfacial adhesion between the matrix and the fibre. Glass fibres have been available in various forms such as woven mat, longitudinal, chopped fibre and chopped mats to enhance the tribological and the mechanical properties of the FR composites [14]. The properties of such composites dependent on the orientation and the nature of the fibres laid during specimen preparation.

**TABLE I**  
MECHANICAL AND PHYSICAL PROPERTIES OF GLASS FIBRE

Type	Density (g/cm <sup>3</sup> )	Tensile Strength (GPa)	Young's Modulus (GPa)	Elongation (%)
E-glass	2.59	3.446	72.31	4.7
C-glass	2.53	3.32	68.94	4.6
S-glass	2.45	4.88	86.92	5.5
A-glass	2.43	3.30	68.99	4.9
R-glass	2.56	4.133	85.58	4.9
EC-Glass	2.74	3.446	85.57	4.7
AR-glass	2.72	3.242	73.11	4.5

### B. Carbon fibres

Out of all the reinforcing fibres, carbon fibres offer the highest specific strength and modulus [15]. Carbon fibre has the ability to maintain its tensile strength even at very high temperatures. Carbon fibres offer high thermal and electrical conductivities with comparatively low coefficient of thermal expansion [16]. These properties of carbon fibre make them ideal for applications in automobile, electronics and aerospace sectors. The carbon fibre provides a maximum strength of 7Gpa, axial compressive strength is 15-60% of its tensile strength. Poly-acrylonitrile (PAN) is the most common precursors used in carbon fibre production, which gives high tensile strength and elastic modulus, mainly applied for structural material composites in sporting/recreational goods and aerospace [17]. Carbon fibres are much versatile, because of their high stiffness to weight and strength to weight ratio. Moreover, they are infusible, chemically inert and electrically conductive. The stiffness and modulus of elasticity of carbon fibers are also much higher [18].

**TABLE II**  
MECHANICAL AND PHYSICAL PROPERTIES OF CARBON FIBRE

Carbon Fiber Type	Tensile Strength (GPa)	Tensile Modulus (GPa)	Breaking Elongation (%)	Density (g/cm <sup>3</sup> )	Carbon Content (wt%)
Low strength	2.5-3.2	245 – 275	1.2-1.5	1.6 -1.9	92 – 94
High strength	3.7 -4.2	245 -275	1.2-1.3	1.6 -1.8	91 -93

Ultra-high strength	4.6 -4.8	251 – 272	1.2-1.45	1.5 -1.9	92 – 95
Intermediate modulus	5.8 -6.1	305	1.21 -1.42	1.8 -1.9	96 -99
high modulus	2.4 -3.0	382 – 405	0.61 -0.73	1.6 -1.8	>99.2
Ultra-high modulus	3.7 -4.1	538 -545	0.31 -0.42	1.8 -2.2	>99.9

### C. Kevlar Fibres


Kevlar is the aramid fibre of Poly-para-phenylen terephthalamide (PPTA) with a strong molecular structure [6]. It can be viewed as, nylon with extra benzene rings on the polymer chain to increase its stiffness. It is mainly popular for its tremendous applications in industry and advanced technologies like helicopter blades, ballistic Armour, sporting goods, pneumatic reinforcement, etc [19]. Kevlar are also employed in applications that perform low weight and high strength together with the high impact resistance or penetrations. Compared to the other synthetic fibres, it shows significantly higher tensile strength, lower fibre elongation and higher tensile modulus [20]. Kevlar also exhibits excellent property to high temperature for polymeric materials. Glass transition temperature of Kevlar is around 370°C and do not melt like nylon.

**TABLE III**  
MECHANICAL AND PHYSICAL PROPERTIES OF KEVLAR FIBRE

Fibre	Characteristics	Tensile Modulus (GPa)	Tensile Strength (GPa)	Extension to Break (%)	Relative Density (g/cm <sup>3</sup> )
Kevlar 29	Regular	71	2.8	4.5	1.43
Kevlar 49	High modulus	134	2.8	2.9	1.46
Kevlar 129	High strength	98	3.5	3.2	1.46
Kevlar 149	Ultra-high modulus	144	2.4	1.6	1.48

### D. Natural fibres

Natural fibres reinforced polymers (NFRP) are being considered as low-cost and lightweight in comparison with the synthetic composites. Natural fibres are normally easier to handle and has good acoustic and thermal insulation properties [21]. There are a wide variety of different natural fibres which can be applied as reinforcement or fillers. The most important types of natural fibres used in composite materials are flax, hemp, jute, kenaf, and sisal due to their properties and easy availability. The major drawback in using natural fibre is the incompatibility between the hydrophilic natural fibres and the hydrophilic thermoplastic matrices during incorporation, which leads to undesirable properties of the resulting composites [22]. Due to low density and satisfactorily high specific properties of natural fibres, the composites based on natural fibres have very good implication in the automotive and transportation industry [23]. All the natural fibres are classified in three categories, mainly based on sources: animals, plant and minerals [24]. Mechanical properties of some of the commonly used natural fibres are [25]-[26] are given in table 4.

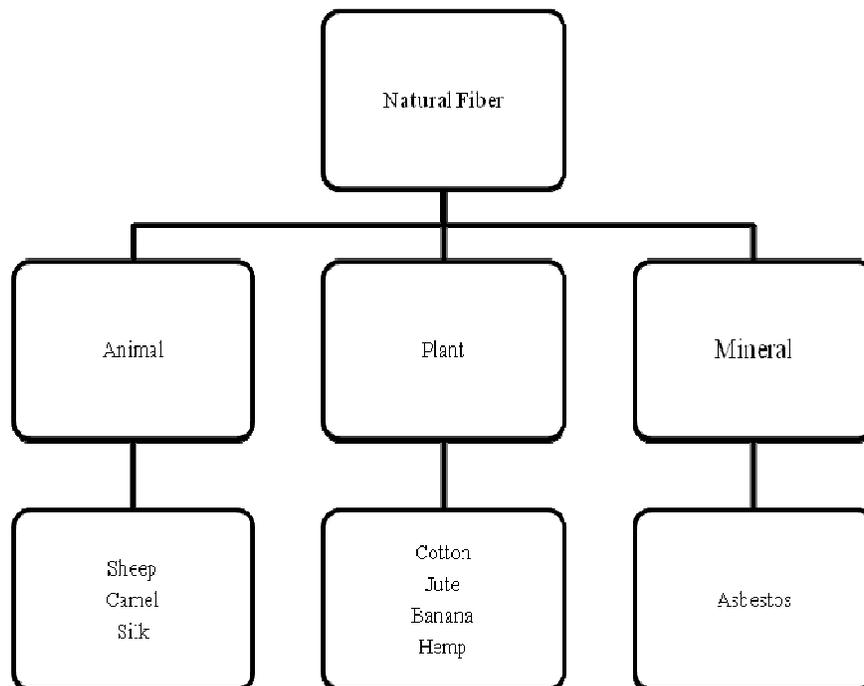

**Fig 1: Classification of natural fibres based on the source of origin**

**TABLE IV  
MECHANICAL AND PHYSICAL PROPERTIES OF NATURAL FIBRE**

<b>Fibre</b>	<b>Tensile strength (GPa)</b>	<b>Elastic modulus (GPa)</b>	<b>Elongation (%)</b>	<b>Density (g/cm<sup>3</sup>)</b>
Cotton	400	5.5-12.6	7.0-8.0	1.5-1.6
Jute	393-700	26.5	1.5-1.8	1.5-1.8
Hemp	690	70	2-4	1.47
Flax	500-1500	27.6	2.7-3.2	2.7-3.2
Kenaf	930	53	1.6	1.45
Sisal	511-635	9.4-22	2-2.5	1.5
Coir	593	4-6	30	1.2

### III. CHEMICAL TREATMENT OF FIBRES

Surface treatment of fibres is one of the methods to improve adhesion between the reinforcement and the matrix [27]-[28]. The composites developed with untreated reinforcements have low interlaminar shear strength [29]. These leads to poor bonding and weak adhesion between the matrix and the fibre. This tends to increase in wet ability of reinforcement [30]. Surface treatments of reinforcements are classified into oxidative and non-oxidative treatments [31]. Treatment increases the roughness of fibre material [32]. The increase in roughness increases the overall surface area of the fibre or reinforcement, which leads to greater interaction between both the matrix and reinforcement [33]-[34]. Surface treatment of reinforcement also influences the chemical structure of reinforcement and thus, enhances the chemical bonding with the matrix. In Oxidation treatment method, acidic functional groups are developed on the reinforcement surface. The effect of the treatment in improving the surface properties of reinforcement depends in the concentration of oxidative medium, temperature, treatment time and the reinforcement itself [35]. Generally, the oxidation is achieved with liquids (by nitric acid, hydrochloric acid etc) or by gases (by air, oxygen, ozone etc.) [36]. Oxidation treatments involve gas-phase oxidation, catalytic oxidation and liquid-phase

oxidation (chemically or electrochemically). Plasma is an electrically conducting medium consist of positively charged ions, negatively charged electrons and neutral atoms or molecules [37]. The purpose of plasma surface treatment of reinforcements in composite materials is to modify the physical and chemical structures of their surface, reinforcement-matrix bonding strength without influencing their mechanical properties [38]. Different adhesion mechanisms can be carried out by plasma treatments. They are: (a) increase surface energy which improve wetting of the reinforcement by the matrix (b) increase the surface roughness of fibre which leads to mechanical locking of matrix and fibres(c) remove the impurities present in the surface of the reinforcement to increase the contact between fibres and matrix and (d) deposit functional groups for proper chemical interactions between the reinforcement and the matrix [39]. In Gamma treatment, reinforcement is exposed to high-energy laser irradiation or gamma-irradiation which guide to surface roughening and addition of some chemical groups like carbonyl [36]. If the composite materials are exposed to the irradiation, resin hardening will take place, which leads to improved strength and wear behaviour of the product [40]. Properties of the fibre reinforced polymer composites improve when, reinforcement get exposed to radiation. It is because of surface roughening of fibre and improved fibre-matrix adhesion [41].

#### IV. MECHANICAL AND TRIBOLOGICAL PROPERTIES

Epoxy matrix filled with graphite filler matrix is used for developing carbon fibre composites. Graphite filler is added in the range of 5 to 30wt% of epoxy. The specimen is developed as the ASTM D638-14 standard. After the testing of each specimen the result shows that, the specimen with 7.5, 10 and 11.5 wt%-graphite show the best balance of mechanical (modulus, strength, strain) properties, because the dispersion of graphite platelets is more homogeneous [42]. Fly ash filled epoxy matrix carbon fibre composites were developed. On the basis of tensile testing and flexural testing as per ASTM standards, it is noted that, the specimen with 6 grams of fly ash obtain the maximum tensile strength whereas, the specimen with 8 grams of fly ash shows the maximum tensile modulus of elasticity, and the specimen with 4 grams of fly ash produces maximum flexural strength [43]. The glass fibre reinforced composites are developed using hand-lap method and compressed with 5kg for 24 hrs. Totally five specimens were created and four of the specimens were kept in different temperatures of 600°C, 900°C,1200°C and 1500°C and heated for one hour. The remaining one specimen is kept as untreated. The tensile test was carried out according to ASTM D 638-01 standard, the impact test according to ASTM D-256 standard and the shear strength according to ASTM D5868 standard. The results show that, heat treatment of the GFRP composite below 1000°C shows best increase in their different mechanical properties [44]. The tribological properties of fibre reinforced polymer matrix composites (FRPCs) depends on different operating and material parameters. Some of the major parameters responsible for the excessive wear and friction of FRPCs are fibre orientation, Fiber volume fraction, fibre length, surface treatment. Fiber orientation is an important factor in the tribological study of fibre reinforced composites. Many researches are done with different orientations like normal, parallel, anti-parallel and random. All of them concluded that the normal orientation gives minimum wear rate while random orientation gives maximum wear rate [45]-[46]. The load carrying capacity of the composite material mainly depends on the fibre volume fraction. As the fibre volume fraction increases the ability of carrying load also increases. But in core researches it is found that, only up to a particular limit of fibre volume faction the ability of load carrying capacity increases, after that its tends to decrease. This is because of the de-bonding between fibre and resin [47]-[48]. Fiber length has a major role to create interfacial bonding with fibre and matrix. According to theoretical sense short lengths of reinforcement decreases the load carrying capacity of fibre and is responsible for higher wear rate and the excessive length of fibre results in easy pull out of the fibers and develop more wear rate [49]. Since surface treatment increases the surface roughness of the reinforcement which results in good bonding strength between the matrix and fibre, and reduces the wear rate [50]. Even sea water can be used for treating the fibers for enhancing the wear resistance [51].

TABLE V  
TRIBOLOGICAL PERFORMANCE OF POLYMER COMPOSITES

Polymer	Fiber	Filler/Treatment	Develop method	Coeff. of friction	Wear rate	Mechanism	Reff:
Polyester	Glass		Molding	Decrease	Decrease	Plastic deformation	[52]
	Al	SiC	Powder		Decrease		[53]

			metallurgy				
PEI	Glass	Graphite, MoS <sub>2</sub> , PTFE			Decrease	Adhesion	[54]
Epoxy	Carbon		Resin transfer molding	Decrease	Decrease	Worn surfaces	[55]
Phenolic	Graphite		Compression molding		Increase		[56]
Epoxy	Carbon		Hand lay up		Decrease		[57]
Polyester	Glass		Hand lay up	Decrease	Decrease	Back transfer polymer film	[58]
Epoxy	Rubber dust		Molding		Decrease	Abrasive	[59]
Epoxy	Glass	SiO <sub>2</sub>	Cylindrical mold	Decrease	Decrease	Adhesion	[60]
	Al	Red mud	Powder metallurgy	Decrease	Decrease	Adhesion	[61]
Epoxy	Glass	SiC	Hand lay up	Decrease	Decrease	Debonding, fiber breakage	[62]
Epoxy	Glass	Graphite and SiC	Hand lay up		Decrease		[63]
Epoxy	Lantana camara		Molding	Decrease	Decrease	Abrasion	[64]
Epoxy	Kenaf		Molding	Increase	Decrease	Adhesion	[65]
Epoxy	Pin wood dust				Decrease		[66]
Polyester	Betelnut fruit fiber		Hand lay up	Increase	Decrease	cracks, debonding, fiberpullout	[67]
Epoxy	Sugar cane		Hand lay up		Decrease	cutting, ploughing	[68]
Polyester	Linen, jute		Molding	Increase	Decrease	Fiberdebonding	[69]
Polyester	Coir	Alkaline	Hand lay up	Increase	Decrease	Adhesion	[70]
Epoxy	Borassus fruit fiber	Alkaline	Cylindrical mold	Decrease	Decrease	Micro cracks	[71]
Polyester	oil palm	Alkaline	Cylindrical mold	Decrease	Decrease	Debonding	[72]
Epoxy	Bamboo		Hand lay up	Decrease	Decrease	Back film transfer	[73]
Epoxy	Rice husk	Benzoylation	Cylindrical mold		Decrease	Abrasive	[74]
Polyester	Bamboo powder		Cylindrical mold		Decrease	Abrasive	[75]
Epoxy	Coir	Benzoylation	Cylindrical mold		Decrease	Abrasive	[76]
Polyurethane	Kenaf	Alkaline	Hand lay up	Decrease	Decrease	Plastic deformation	[77]
Epoxy	cellulose fiber	Nano SiC, Nano clay			Decrease		[78]

Wear can be defined as a progressive loss of materials from the contacting surfaces due to their relative motion [79]. Actually, wear is an erosion or sideways displacement of particles between two surfaces in contact due to their relative movement [80]. Along with the fatigue and the corrosion, wear is being known as, one of the three important factors which limit the life and the performance of an engineering system or an engineering component [81]. Damages due to wear are of two types. (a) Removal of materials from the contacting areas reduces the overall dimension of the component. This leads to the increase in clearance between the moving parts and gradually leads to high vibration and high noise which reduces the efficiency and results in malfunction of the system [82]. If dynamic loading is applied to thus components, the reduced dimension of the component will result in fatigue failure or fracture [83]. (b) Material removed from the worn surface, commonly known as wear debris, are also harmful. These debris act as abrasive particles which results in increased wear rate similar to three body abrasion wear [84]. These debris can create block sin valves, pipe lines, oil filters or gather together in electrical contacting point which may cause short circuits and thus prevent the normal functioning of the system [85]. The cost of wear is high, so great efforts have been made from the early ages of industries, with focuses to reduce or eliminate wear.

Different forms of wear exist in industry. Different methods are used to categorise wear processes. Wear can be generally classified as: (a) Lubricated wear and unlubricated wear (b) Severe wear and Mild wear (c) Sliding wear, rolling contact wear and impact wear [86]. However, all these wear process involve one or, a combination of

different wear mechanisms including adhesion, abrasion, fatigue, oxidation or other tribo-chemical actions etc [87]. To solve a wear problem, it is important to understand or study the different underlying wear mechanisms. If the wear cannot be completely avoided at all, by changing its nature of wear from abrasion or adhesion to oxidation i.e. by the surface engineering of the contacting parts, can be considerably reduces the overall wear rate [88]. Adhesive Wear is the removal of material due to adhesion between two surfaces [89]. It is of two types (a) Mild adhesion: - It is the removal of surface films, such as oxides, at a low rate. (b) Severe adhesion: - It is the removal of metal due to breaking, tearing and melting of metallic joints. This leads to galling or scuffing of the surfaces and even takeover. Abrasive Wear is the cutting of grooves on a surface by hard particles, (for example, sand particles between two contact surfaces, or hard asperities on an opposing surface) [90]. Hard coatings can reduce the abrasive wear. Erosion Wear is the cutting of grooves on a surface by hard particles in a fluid which is travelling at high velocity [91]. Polishing Wear is the continuous removal of surface films, laid down through a chemical reaction from an additive in oil may be a fine hard particle in the lubricant [92]. Polishing wear is characterized by very shiny, smooth, mirror like metal surfaces. Contact fatigue is the cracking, grooving, and spalling of a surface in sequence due to repeated stresses in contact [93]. Contact fatigue is most common in rolling element like bearings, gear teeth, cams etc. Corrosive wear is the removal of corrosion products from a surface by motion, such as the rubbing off the rust from iron surface. Electro-Corrosive wear is the removal of metal by dissolution in a corrosive liquid with the help of electric currents. One source of currents is streaming potential from the high velocity fluids. The oil act as the electrolyte. Fretting wear is a localized wear in lubricated surfaces due to the reciprocating sliding at extremely low amplitude because of vibration. Electrical discharge wear is the removal of the molten metal from the surfaces due to electrical sparks between them. High static voltages, sometimes generated by the large rotating machinery and this static voltage are relieved by sparking to regions of low potential.

Dynamic Mechanical Analysis (DMA) is a method which is commonly used to characterize material's properties as a function of temperature, frequency, atmosphere, time, stressor a combination of these parameters [94]. Dynamic Mechanical Analysis, also known as DMA, is a technique in which a small deformation is being applied to the sample in a cyclic manner. DMA allows the material response to stress, frequency, temperature and other parameters to be studied. DMA is also known as DMTA for Dynamic Mechanical Thermal Analysis [95].

Thermo mechanical Analysis (TMA), provides a constant static force to the material and watch the change in material as temperature or time get varies. It provides the dimensional changes. While, DMA applies an oscillatory force in a constant frequency to the sample and gives the changes in damping and stiffness. DMA data is being used to obtain the modulus information while, the TMA gives the coefficient of thermal (CTE). Both detect transitions, but DMA is more sensitive and accurate [96].

When carbon fibre/epoxy composites with different fibre volume fraction was subjected to different experimental parameters such as frequency, temperature, amplitude and oscillation mode. It is found that, opposed to the storage modulus, the loss modulus is sensitive to all parameters [97]. In fixed multiple frequency mode, the loss modulus increases with oscillation amplitude and decreases with number of tests and frequency [98]. The detection of the interfacial properties is more sensitive in flexural deformation mode than in torsional mode. [99]. In DMA, dynamic heating to attain complete curing gives proof of thermal degradation which leads to diminished final glass transition temperature [100]. Activation energy for glass transition changes by a factor of three from cureless resin to fully cured resin [101].

## V. MOISTURE ABSORPTION STUDIES

The study of mechanical properties of fibre reinforced polymeric materials under different environmental conditions is much important. Moisture absorption is one of the main problems for fiber reinforced polymer composites. The presence of the moisture will lead to the degradation of the composite product before its life cycle [102]. The tendency to absorb the moisture is much greater for natural fibers compared to synthetic fibers. Hydrophilic natural fibres are incompatible with hydrophobic thermosetting resins, and it is necessary to improve the adhesion between fibre and matrix, the use of chemical treatments. Natural fibers have been limited by their susceptibility to water absorption, due to their chemical composition being rich in cellulose, hydrophilic in nature. Water absorption results in the swelling of the fibre that could reduce the mechanical and dimensional properties of the composites as a result

of the appearance of micro cracks at fibre-matrix space [103]. Many researches are being carried out on the treatment of the natural fibers to increase their mechanical as well as physical and chemical properties. Natural fibers are normally treated with NaOH in different concentrations to improve its physical, chemical and mechanical properties by reducing the presence of moisture content [104-106].

## VI. RECYCLING THE FIBRE REINFORCED COMPOSITES

One of the major drawbacks related to polymer composites is its recycling. Today environment legislation is becoming, more confining, it is now mandatory to find industrial scale solution to the problem of recycling these polymer product [107]. Thermolysis and solvolysis are the two-common method used for recycling. The recycling technique should be selected on the basis of the material being recycled and the reuse applications. Thermolysis is appeared to be more appropriate for glass fibre and carbon fibre composites. Thermo-chemical processes are now not used for GFRCs because of the low price of GF and the degraded mechanical properties of the GFs are attained in this technique. These processes are mainly used to recover valuable products from the resin to be used in new resins. Mechanical recycling includes the grinding of materials more finely after initial crushing or cutting into smaller pieces [108]; the rest is same to all the recycling techniques. Thermal processes consist of pyrolysis, fluidised-bed pyrolysis and pyrolysis assisted with microwaves [109]-[112]. These techniques provide the recovery of fibres, fillers and inserts. Developments in recycling are happening in right sense, but bringing the recycled product in commercial reality is still a challenging task.

## VII. CONCLUSION

In recent decades large amount of research work in being carried out in the field of fibre reinforced polymer composites. The logical basis for a conducting a review on fiber reinforced polymer composite is to study about the various fibres and its inherent properties. A detailed study about the mechanical and tribological properties of polymer composites reinforced with natural and synthetic fibres were presented here. This paper has reviewed the research works that focuses on the improvement in mechanical and tribological properties. The Mechanism behind the wear phenomena were analysed thoroughly. Improvement in properties can be achieved through proper selection of fibre, extraction, treatment of fibers as well as interfacial engineering.

## REFERENCE

- [1] P.K. Mallick, "Fiber Reinforced Composites Materials, Manufacturing, and Design". Third edition. CRC press, London.
- [2] Rowell, R.M., 1995, "A new generation of composite materials from agro-based fibre," in The Third International Conference on Frontiers of Polymers and Advanced Materials, Kuala Lumpur, Malaysia.
- [3] J.P.Davim, C.Rosaria, "Effect of reinforcement (carbon or glass fibre) on friction and wear behaviour of the PEEK against steel surface at long dry sliding", *Wear* 266(2009)795–799.
- [4] Banakar P, Shivanand HK, Niranjana HB (2012) "Mechanical Properties of Angle Ply Laminated Composites"-A Review. *International Journal of Pure and Applied Sciences and Technology* 9: 127-133.
- [5] Kamal Kumar Basumatary, 2013. "Investigation into Mechanical and Tribological Properties of Ipomoea carnea Reinforced Epoxy Composite". Department of Mechanical Engineering. National Institute of Technology. Rourkela.
- [6] Zhang Q, Liang Y, Warner SB (1994) "Partial carbonization of aramid fibers". *Journal of Polymer Science Part B: Polymer Physics* 32: 2207-2220.
- [7] Emad Omrani, Pradeep L. Menezes, Pradeep K. Rohatgi (2016). "State of the art on tribological behavior of polymer matrix composites reinforced with natural fibers in the green materials world". Elsevier. 19 (2016) 717–736.
- [8] McGee AC, Dharan CKH, Finnie I (1987) "Abrasive wear of graphite fiber reinforced polymer composite materials". *Wear* 114: 97-107.

- [9] Prashanth S, Subbaya KM, Nithin K, Sachhidananda S (2017). "Fiber Reinforced Composites - A Review." DOI: 10.4172/2169-0022.1000341
- [10] Thostenson ET, Ren Z, Chou TW. "Advances in the science and technology of carbon nanotube and their composites: a review". *Compos Sci Technol* 2001; 61:1899–912.
- [11] A.R. Bunsell, Hybrid carbon and glass fibre composites, *Composites*. July (1974) 157-164.
- [12] Siha N, Banarjee AN, Mitra BC, Dynamic Mechanical study on unidirectional polyethylene fibre-PMMA and glass fibre-PMMA composite laminates, *J Appl Polym Sci*: 60: (1996) 657-62
- [13] Ban Bakir, Haithem Hashem (2013). "Effect of Fiber Orientation for Fiber Glass Reinforced Composite Material on Mechanical Properties".
- [14] Subramanian C, Senthilvelan S (2011) "Joint performance of the glass fiber reinforced polypropylene leaf spring". *Composite Structures* 93: 759-766.
- [15] Li J. "The effect of surface modification with nitric acid on the mechanical and tribological properties of CFs-reinforced thermoplastic polyimide composite". *Surf Interf Anal* 2009; 41(9): 759-63.
- [16] Sellitti C, Koenig JL, Ishida H. "Surface characterization of graphitized CFs by attenuated total reflection fourier transform infrared spectroscopy". *Carbon* 1990;28 (1): 221-8.
- [17] Ohsawa T, Miwa M, Kawade M, Tsushima E (1990) "Axial compressive strength of carbon fiber." *Journal of Applied Polymer Science* 39: 1733-1743.
- [18] Ph. Werner, V. Altsta dt, O. Jacobs, R. Jaskulka, K.W. Sandler, S.P. Saffer, A.H. Windle. "Tribological behaviour of carbon-nanofiber reinforced poly (ether ether ketone)", *Wear* 257 (2004) 1006–1014.
- [19] Tanner D, Fitzgerald JA, Phillips BR (1989). "The kevlar story-an advanced materials case study". *Angewandte Chemie International Edition in English* 28: 649-654.
- [20] Zhang Q, Liang Y, Warner SB (1994) "Partial carbonization of aramid fibers". *Journal of Polymer Science Part B: Polymer Physics* 32: 2207-2220.
- [21] Lee BH, Kim HJ, Yu WR. "Fabrication of long and discontinuous natural fiber reinforced polypropylene bio composites and their mechanical properties." *Fibers Polym* 2009;10(1):83–90.
- [22] Dittenber DB, GangaRao HVS. "Critical review of recent publications on use of natural composites in infrastructure." *Composites Part A* 2011;43(8):1419–29.
- [23] F. Ahmad, H.S. Choi, M.K. Park, "A review: natural fiber composites selection in view of mechanical, light weight, and economic properties", *Macromol. Mater. Eng.* 300 (2015) 10–24.
- [24] Pickering K. "Properties and performance of natural-fibre composites." Cambridge, England: Woodhead Publishing; 2008.
- [25] Beg MDH. "The improvement of interfacial bonding, weathering and recycling of wood fibre reinforced polypropylene composites". PhD thesis. Hamilton, New Zealand: University of Waikato; 2007.
- [26] Kang JT, Park SH, Kim SH. "Improvement in the adhesion of bamboo fiber reinforced polylactide composites." *J Compos Mater* 2013;48(21): 2567–77.
- [27] Alam S, Habib F, Irfan M, Iqbal W, Khalid K (2010) "Effect of orientation of glass fiber on mechanical properties of GRP composites". *J. Chem. Society Pakistan* 32: 265-269.
- [28] Weitzsacker L, Ming X, Drzal LT. "Analysis to investigate fiber/matrix chemical interactions in carbon fiber reinforced composites." *Surf Interface Anal* 1997; 25: 53-63.
- [29] Ibarra L, Macias A, Palma E, "Stress strain and stress relaxation in oxidated short carbon fiber thermoplastic elastomer composites." *J Appl Polym Sci* 1996; 61: 2447-54.
- [30] Delamar M, Desarmot G, Fagebaume O, Hitmi R, Pinson J, Saveant JM. "Modification of carbon fibers surfaces by electrochemical reduction of aryl diazonium salts application to carbon epoxy composites." *Carbon* 1997;35: 801-7.

- [31] Zhang X, Pei X, Jia Q, Wang Q. "Effects of CFs surface treatment on the tribological properties of 2D woven carbon fabric/polyimide composites." *Appl Phys A* 2009;95: 793–9.
- [32] Sun M, Hu B, Wu Y, Tang Y, Huang W, Da Y. "Surface of CFs continuously treated by cold plasma." *Comp Sci Tech* 1989;34: 353-64.
- [33] Zhang XR, Zhao P, Pei XQ, Wang QH, Jia Q. "Flexural strength and tribological properties of rare earth treated short CFs/polyimide composites." *Ex Poly Lett* 2007;1(10):667–72.
- [34] Tiwari S, Bijwe J, Panier S. "Role of Nano YbF<sub>3</sub> treated carbon fabric on improving abrasive wear performance of Polyetherimide composites", *Tribol Lett* 2011;42(3):293-300.
- [35] Tran MQ, Ho KC, Kalinka G, Shaffer SP, Bismarck A. "CFs reinforced poly (vinylidene fluoride): Impact of matrix modification on fiber/polymer adhesion". *Comp Sci Tech* 2008;68: 1766-76.
- [36] S. Tiwaria, J. Bijwe. "Surface Treatment of Carbon Fibers - A Review." *Procedia Technology* 14 (2014) 505 – 512
- [37] Donnet JB, Brendle M, Dhami TL, Bahl OP. "Plasma treatment effect on the surface energy of carbon and CFs." *Carbon* 1986; 24:757-70.
- [38] Li R, Ye L, Mai Y. "Application of plasma technologies in fibre-reinforced polymer composites: a review of recent developments". *Compos A* 1997;28: 73-86.
- [39] Tiwari S, Sharma M, Panier S, Mutel B, Mitschang P, Bijwe J. "Influence of cold remote nitrogen oxygen plasma treatment on carbon fabric and its composites with specialty polymers." *J Mater Sci* 2011;4(46):964-74.
- [40] Tiwari S, Bijwe J, Panier S. "Polyetherimide composites with Gamma irradiated carbon fabric: Studies on abrasive wear". *Wear* 2011;270: 688-94.
- [41] Li J, Huang Y, Fu S, Yang L, Qu H, Wu G. "Study on the surface performance of CFs irradiated by Gamma-ray under different irradiation dose". *Appl Surf Sci* 2010; 256:2000-04.
- [42] Ricardo Baptista, Ana Mendo, Mafalda Guedes (2016). "An experimental study on mechanical properties of epoxy-matrix composites containing graphite filler". Elsevier, *Procedia structural integrity*.
- [43] S.Pichi Reddy, P.V.Chandra Sekhar Rao, A.Chennakesava Reddy, G.Parmeswari. "Tensile and flexural strength of glass fiber epoxy composites". Department of Mechanical Engineering, L.B.Reddy College of Engineering, Mylavaram.
- [44] A.H.M Fazle Elahi, Md. Milon Hossain, Shahida Afrin, Mubarak A. Khan (2014). "Study on the Mechanical Properties of Glass Fiber Reinforced Polyester Composites". ICMIEE-PI-140304
- [45] Baghaei B, Skrifvars M, Salehi M, Bashir T, Rissanen M, Nousiainen P. "Novel aligned hemp fibre reinforcement for structural biocomposites: porosity, water absorption, mechanical performances and viscoelastic behaviour." *Composites Part A* 2014; 61:1–12.
- [46] Navin C and Dwivedi UK. "Sliding wear and friction characteristics of sisal fibre reinforced polyester composites: effect of sisal coupling agent and applied load". *J Compos* 2011; 46(2): 280–284.
- [47] Aireddy H. "Tribological behaviour and mechanical properties of bio-waste reinforced polymer matrix composites". *J Metallurgy Mater Sci* 2011; 53: 139–152.
- [48] Schon J. "Coefficient of friction and wear of a carbon fiber epoxy matrix composite." *Int J Wear* 2004; 257: 395–407.
- [49] Mahapatra SS and Vedansh C. "Modelling and Analysis of abrasive wear performance of composites using Taguchi approach." *Int J Eng Sci Technol* 2009; 1: 123–135.
- [50] Islam MS, Pickering KL, Foreman NJ. "Influence of alkali fiber treatment and fiber processing on the mechanical properties of hemp/epoxy composites." *J Appl Polym Sci* 2011;119(6):3696–707.
- [51] Ishak MR, Leman Z, Sapuan SM, et al. "The effect of sea water treatment on the impact and flexural strength of sugar palm fibre reinforced epoxy composites." *Int J Mech Mater Eng IJMME* 2009; 4: 316–320.

- [52] Tayeb NSM. "A study on the potential of sugarcane fibers/polyester composite for tribological application." *J Wear* 2008; 265: 223–235.
- [53] Charanjit S and Lakhvir S. "Synthesis and tribological characterization of Al-SiC composite prepared by mechanical alloying." *Int J Mech Eng Mater Sci* 2012; 5: 31–36.
- [54] Bijwe J, Indumathi J, Rajesh J, et al. "Friction and wear behaviour of polyetherimide composites in various wear modes." *J Wear* 2001; 249: 715–726.
- [55] Wan YZ, Luo HL, Wang YL, et al. "Friction and wear behaviour of three-dimensional braided carbon fiber/epoxy composites under lubricated sliding conditions." *J Mater Sci* 2005; 40: 4475–4481.
- [56] Kolluri DK, Satapathy BK, Bijwe J, et al. "Analysis of load and temperature dependence of tribo-performance of graphite filled phenolic composites." *Mater Sci Eng A* 2007; 456: 162–169.
- [57] Munium A and Algbory RM. "Wear rate behaviour of carbon/epoxy composite materials at different working conditions." *Iraqi J Mech Mater Eng* 2011; 11: 475–485.
- [58] Yousif BF. "Design of newly fabricated tribological machine for wear and frictional experiment under wet and dry condition." *J Mater Des* 2013; 48: 2–13.
- [59] Antaryami M. "Dry sliding wear behaviour of epoxyrubber dust composites." *World Acad Sci Eng Technol* 2012; 67: 579–584.
- [60] Shivamurthy B, Siddaramaiah and Prabhswamy MS. "Influence of SiO<sub>2</sub> fillers on sliding wear resistance and mechanical properties of compression moulded glass epoxy composites." *J Minerals Mater Character Eng* 2009; 8: 513–530.
- [61] Rajesh S, Rajakarunakaran S and Pandian S. "Modelling and optimisation of sliding specific wear and coefficient of friction of Al based red mud metal matrix composite using Taguchi method and RSM." *J Mater Phys Mech* 2012; 15: 150–166.
- [62] Mohan N, Natarajan S, Kumaresh Babu SP, et al. "Investigation on two-body abrasive wear behavior of silicon carbide filled glass fabric-epoxy composites." *J Miner Mater Character Eng* 2010; 9: 231–246.
- [63] Basavarajappa S, Arun KV and Paulo Davim J. "Effect of filler material on dry sliding wear behaviour of polymer matrix composites—A Taguchi approach." *J Miner Mater Character Eng* 2009; 8: 379–391.
- [64] Chittaranjan Deo and Acharya SK. "Effect of fiber content on abrasive wear of Lantana camara fiber reinforced polymer matrix composite." *Indian J Eng Mater Sci* 2010; 17: 219–223.
- [65] Chin CW and Yousif BF. "Potential of kenaf fibers as reinforcement for tribological application." *J Wear* 2009; 267: 1550–1557.
- [66] Gangulari Kranthi, Rajlakshmi N, Biswas S, et al. "Wear performance evaluation of pine wood dust filled epoxy composites." In: *Proceeding of the International conference on advancements in Polymeric Materials APM*, 20–22 February 2010, CIPET, Bhubaneswar.
- [67] Yousif BF, Lau STW and McWilliam S. "Polyester composite based on betelnut fiber for tribological application." *Tribol Int* 2010; 43: 503–511.
- [68] Punyapriya M and Acharya SK. "Anisotropy abrasive wear behaviour of bagasse fiber reinforced polymer composite." *Int J Eng Sci Technol* 2010; 2: 104–112.
- [69] Sayed El, El-Sherbiny MG, Abo-El-Ezz AS, et al. "Friction and wear properties of polymeric composite materials for bearing applications." *J Wear* 1995; 184: 45–53.
- [70] Yousif Belal F, Leong OB, Ong LK, et al. "The effect of treatment on tribo performance of CFRP composites." *Recent Patents Mater Sci* 2009; 2: 67–74.
- [71] Bhoopathi L, Sampath PS and Mysamy K. "Influence of fiber length in the wear behaviour of borassus fruit fiber reinforced epoxy composites." *Int J Eng Sci Technol* 2009; 4: 4119–4129.

- [72] Yousif BF and El-Tayeb NSM. "Wet adhesive wear characteristics of untreated oil palm fiber reinforced polyester and treated oil palm fiber reinforced polyester composites using the pin on disc and block on ring techniques." *J Eng Tribol* 2009; 224: 123–131.
- [73] Nirmal U, Hashim J and Low KO. "Adhesive wear and frictional performance of bamboo fibres reinforced epoxy." *Int J Tribol* 2012; 47: 122–133.
- [74] Majhi S, Samantarai SP and Acharya SK. "Tribological behavior of modified rice husk filled epoxy composite." *Int J Scientific Eng Res* 2012; 3: 1–5.
- [75] Dwivedi Umesh K, Ajay G and Chand N. "Abrasive wear behaviour of bamboo powder filled polyester composites." *J Bio Resources* 2007; 2: 693–698.
- [76] Rao Chandra CK, Madhusudan S, Raghavendra G, et al. "Investigation in to wear behaviour of coir fiber reinforced epoxy composites with Taguchi method." *J Eng Res Appl* 2012; 2: 371–374.
- [77] Narish Singh BF, Yousif and Rilling D. "Tribological characteristics of sustainable fiber-reinforced thermoplastic composites under wet adhesive wear." *Tribol Trans* 2011; 54: 736–748.
- [78] Nguong CW, Lee SNB and Sujun D. "A Review on natural fibre reinforced polymer composites." *World Acad Sci Eng Technol* 2013; 73: 1123–1130.
- [79] G. W. Stachowiak, "Tribology of polymeric solids and their composites," in *Wear: Materials, Mechanisms and Practice*, chapter 10, pp. 223–267, John Wiley & Sons, New York, NY, USA, 2005.
- [80] H. Voss and K. Friedrich, "Wear performance of a bulk liquid crystal polymer and its short-fibre composites," *Tribology International*, vol. 19, no. 3, pp. 145–156, 1986.
- [81] K.H. Zum Gahr, "Microstructure and Wear of Materials", *Tribology Series*, vol. 10, Elsevier, Amsterdam, 1987.
- [82] S. Bahadur, D.L. Gong, "The role of copper compounds as fillers in the transfer and wear behaviour of polyetherether ketone", *Wear* 154 (1) (1992) 151–165.
- [83] J.K. Lancaster, "Friction and wear in polymer science", in: A.D. Jenkins (Ed.), *A Materials Science Hand Book*, North Holland, Amsterdam, 1972.
- [84] B. Suresha, G. Chandramohan, P. Samapathkumaran, S. Seetharamu, Vynatheya, "Friction and wear characteristics of carbon-epoxy and glass-epoxy woven roving fiber composites", *J. Reinf. Plast. Compos.* 25 (2006) 771–782.
- [85] Z. Lu, K. Friedrich, W. Pannhorst, J. Heinz, "Wear and friction of unidirectional carbon fiber–glass matrix composite against various counterparts", *Wear* 162–164 (1993) 1103–1110.
- [86] B. Suresha, G. Chandramohan, M.N. Renukappa, Siddaramaiah, "Mechanical and tribological properties of glass-epoxy composites with and without graphite", *J. Appl. Polym. Sci.* 103 (2007) 2472–2480.
- [87] B.S. Tripaty, M.J. Furey, "Tribological behaviour of unidirectional graphite-epoxy and carbon-PEEK composites", *Wear* 162–164 (1993) 385–396, Part-1.
- [88] B. Viswnath, A.P. Verma, C.V.S. Kameswara Rao, "Effect of reinforcement on friction and wear of fabric reinforced polymer composites", *Wear* 167 (1993) 93–99.
- [89] H. Czichos, "Influence of adhesive and abrasive mechanisms on the tribological behaviour of thermoplastic polymers," *Wear*, vol. 88, no. 1, pp. 27–43, 1983.
- [90] U. S. Tewari and J. Bijwe, "On the abrasive wear of some polyimides and their composites," *Tribology International*, vol. 24, no. 4, pp. 247–254, 1991.
- [91] *Standard Terminology Relating to Wear and Erosion*, vol. 3 of *Annual Book of Standards*, ASTM, 1987.
- [92] S. Bahadur and D. Tabor, "The wear of filled polytetrafluoroethylene," *Wear*, vol. 98, pp. 1–13, 1984.
- [93] M. Sudheer, R. Prabhu, K. Raju, and T. Bhat, "Optimization of dry sliding wear performance of ceramic whisker filled epoxy composites using taguchi approach," *Advances in Tribology*, vol. 2012, Article ID431903, 9 pages, 2012.
- [94] K.P. Menard, "Dynamic Mechanical Analysis: A Practical Introduction", CRC Press, 1999.

- [95] W. Stark, "Investigation of the curing behaviour of carbon fibre epoxy prepreg by Dynamic Mechanical Analysis DMA", *Polym. Test* 32 (2013) 231e239.
- [96] W. Stark, H. Goering, U. Michel, H. Bayerl, "Online monitoring of thermoset post-curing by dynamic mechanical thermal analysis DMTA", *Polym. Test* 28 (2009) 561e566.
- [97] Hameed N, Sreekumar PA, Francis B, Yang W, Thomas S, "Morphology, dynamic mechanical and thermal studies on poly(styrene-coacrylonitrile) modified epoxy resin/glass fibre composites". *Compos Part A: Appl Sci Manuf*: 38 (12): (2007)2422-32.
- [98] Siha N, Banarjee AN, Mitra BC, "Dynamic Mechanical study on unidirectional polyethylene fibre-PMMA and glass fibre-PMMA composite laminates", *J Appl Polym Sci*: 60: (1996) 657-62
- [99] Jawad M, Abdul Khalil H P S, Omar S Alattas, "Woven hybrid biocomposites: Dynamic mechanical and thermal properties", *Composites: Part A* 43 (2012) 288-293
- [100] G. Li, P. Lee-Sullivan, R.W. Thring, "Determination of activation energy for glass transition of an epoxy adhesive using dynamic mechanical analysis", *J. Therm. Anal. Calorim* 60 (2000) 377e390.
- [101] K.P. Pang, J.K. Gillham, "Competition between cure and Thermal- Degradation in a high tg epoxy system - effect of time and temperature of isothermal cure on the glass-transition temperature", *J. Appl. Polym. Sci* 39 (1990) 909e933.
- [102] Tserki V, Zafeiropoulos NE, Simon F, Panayiotou C. "A study of the effect of acetylation and propionylation surface treatments on natural fibres." *Composites Part A* 2005;36(8):1110–8.
- [103] Graupner N. "Improvement of the mechanical properties of biodegradable hemp fiber reinforced poly (lactic acid) (PLA) composites by the admixture of man-made cellulose fibers." *J Compos Mater* 2009;43(6):689–702.
- [104] Lifang Liu, Jianyong Yu, Longdi Cheng, Weiwei Qua (2009). "Mechanical properties of poly butylene succinate(PBS) bio composites reinforced with surface modified jute fibre".
- [105] J. Riccieri, L.H. De Carvalho, A. Vazquez. "Interfacial properties and initial step of the water sorption in unidirectional unsaturated polyester/vegetable fiber composites", *Polym. Compos.* 20 (1999) 29.
- [106] N. Lou, A. Netrali, "Mechanical and thermal properties of environment friendly "green" composites made from pineapple leaf fibres and poly (hydroxyl butyrate-co-valerate) resin", *Polym. Compos.* 20 (1999) 367–378.
- [107] Géraldine Oliveux, Luke O. Dandy, Gary A. Leeke. "Current status of recycling of fibre reinforced polymers: Review of technologies, reuse and resulting properties". *Progress in Materials Science* 72 (2015) 61–99.
- [108] Molnar A. "Recycling advanced composites". Final report for the Clean Washington Center (CWC), December 1995.
- [109] Markovic V, Marinkovic S. "A study of pyrolysis of phenolic resin reinforced with carbon fibres and oxidized PAN fibres." *Carbon* 1980; 18:329–35.
- [110] Cunliffe AM, Williams PT. "Characterisation of products from the recycling of glass fibre reinforced polyester waste by pyrolysis." *Fuel* 2003; 82:2223–30.
- [111] Pickering SJ, Kelly RM, Kennerley JR, Rudd CD, Fenwick NJ. "A fluidised-bed process for the recovery of glass fibres from scrap thermoset composites." *Compos Sci Technol* 2000; 60:509–23.
- [112] Meyer LO, Schulte K. "CFRP-recycling following a pyrolysis route: process optimization and potentials." *J Compos Mater* 2009; 43:1121–32.